

Fig. 1B

Waveform of output current from driver

High impedance

Waveform of voltage

Selection period R

At luminance of 50%

At luminance of 50%

Constant current

Current

High impedance

High impedance

Selection period R

Fig. 1A

Fig. 1C Fig. 1D

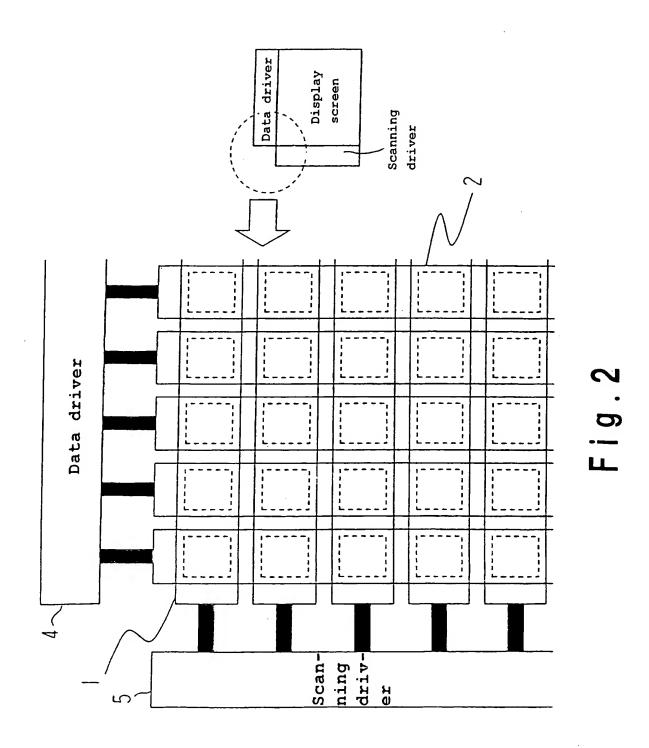


Fig.3

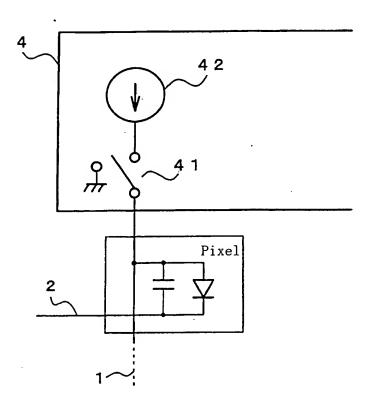


Fig.4

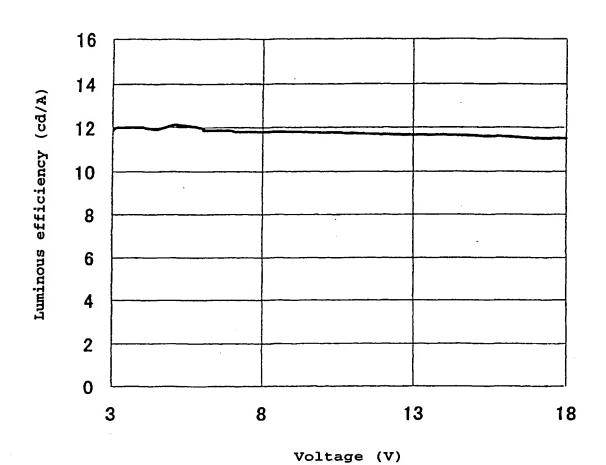


Fig.5


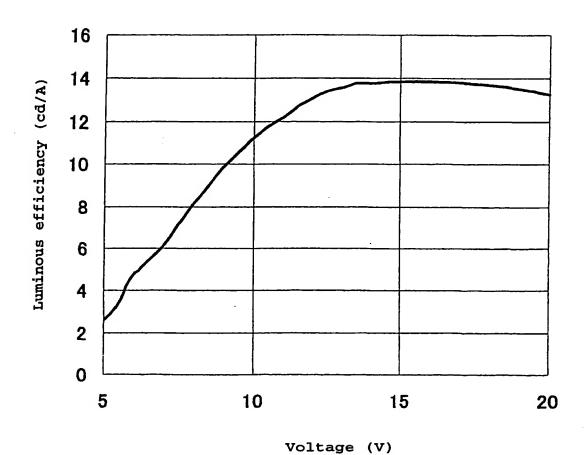


Fig.6

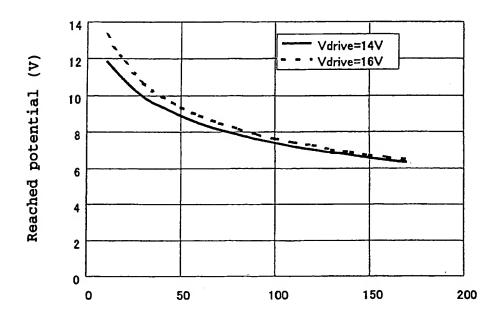


High impedance time (µs)

OBLON, SPIVAK, et al Docket No: 246069US2 Inventor: Naoki KATO


Serial No: 10/724,124 Reply to NFMP dated: February 27, 2004


Replacement Sheet

Fig.7

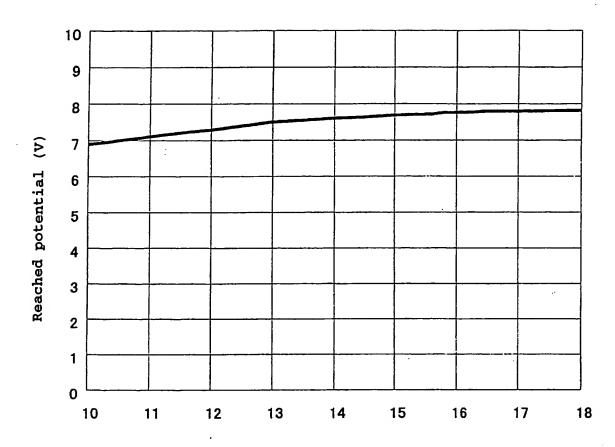

Voltage at end of constant current section (V)

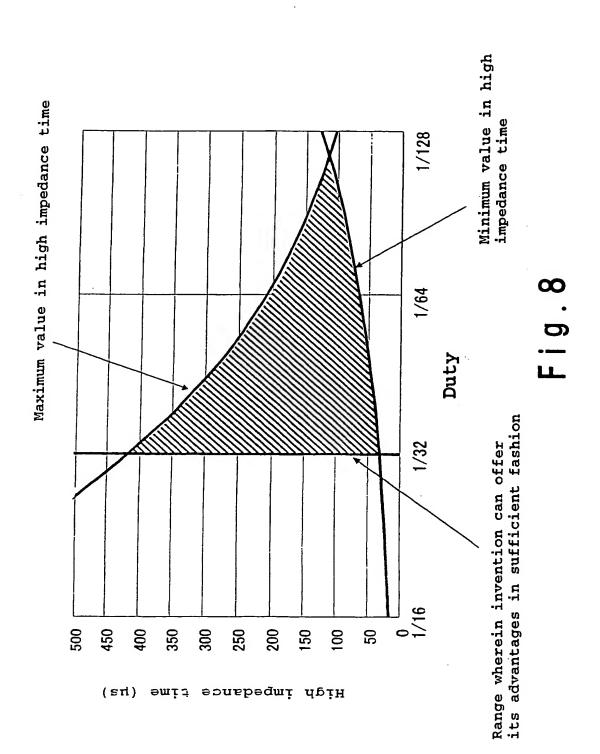

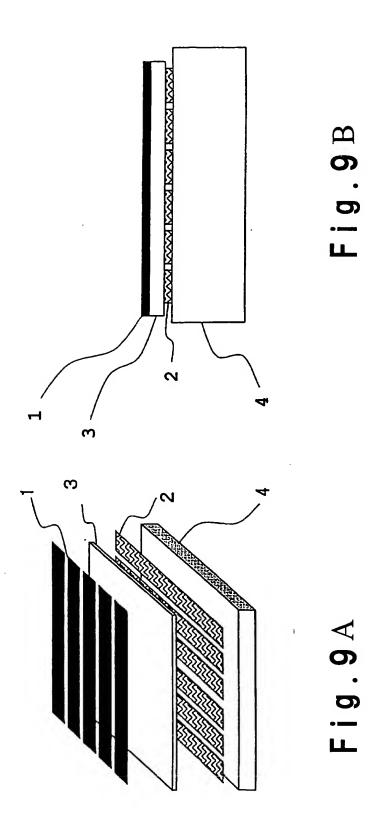

OBLON, SPIVAK, et al Docket No: 246069US2 Inventor: Naoki KATO Serial No: 10/724,124

Reply to NFMP dated: February 27, 2004

Replacement Sheet

Fig. 10

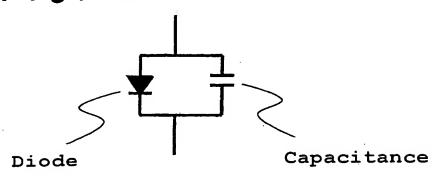


Fig. 11





Fig. 12


Selection period



OBLON, SPIVAK, et al Docket No: 246069US2 Inventor: Naoki KATO Serial No: 10/724,124

Reply to NFMP dated: February 27, 2004

Replacement Sheet

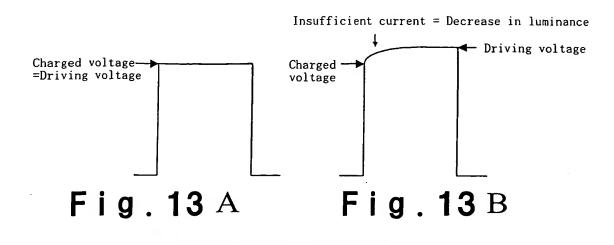


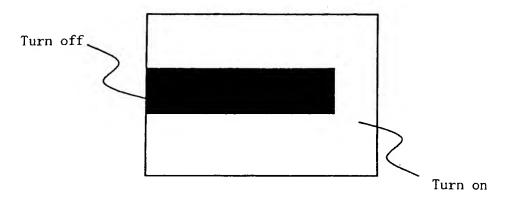


Fig. 14 A Image to be displayed

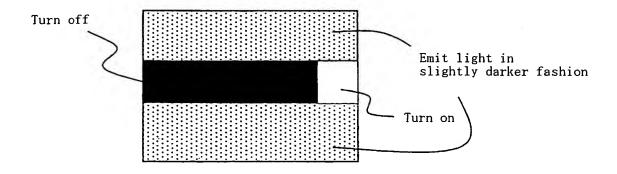

 $Fig. 14\,B$ Actually displayed image

OBLON, SPIVAK, et al Docket No: 246069US2 Inventor: Naoki KATO Serial No: 10/724,124

Reply to NFMP dated: February 27, 2004

Replacement Sheet

Fig. 15 A

Fig. 15B

